




Resucoat™ HB SR

High build epoxy flooring coating system with light non-slip texture

Resucoat™ HB SR is a high build epoxy resin system with a light non-slip texture for application as a heavy duty floor coating at a thickness of around 500 microns. The finish will provide a textured non-slip gloss coloured finish which is suitable for all areas of industry where a hard wearing and chemically resistant floor coating is required.

- ④ **Topcoat:**
Resucoat HB
- ③ **Broadcast:**
Aluminium oxide aggregate
- ② **Basecoat:**
Resucoat HB
- ① **Primer (optional):**
Resuseal WB Clear
- ① **Substrate:**

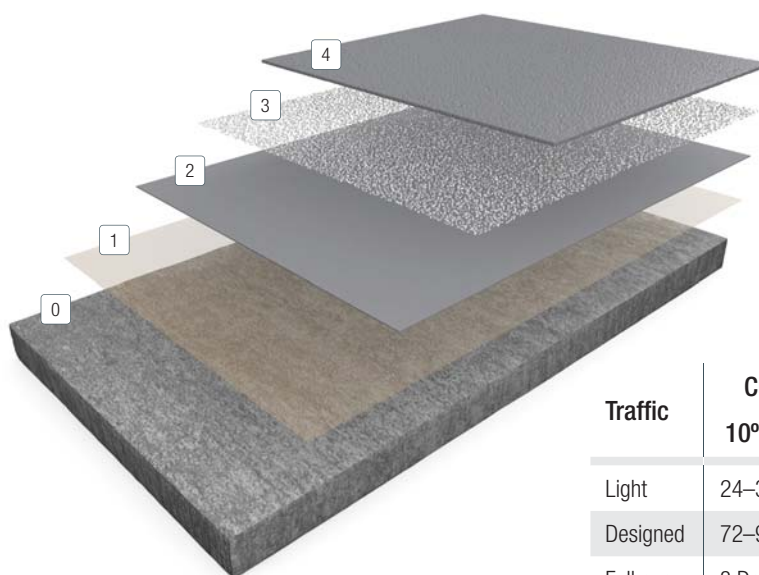

Traffic	Cure to service (hrs)		
	10°C	20°C	30°C
Light	24–36	12–16	8–12
Designed	72–96	48–72	24–48
Full cure	8 Days	≤7 Days	5 Days

Benefits

- High build finish.
- Non-slip performance.
- Solvent-free.
- Hygienic and easily cleaned.
- Good colour stability.
- Excellent slip resistance with the inclusion of selected aggregates.
- High gloss finish.
- Available in a wide range of colours.

Scope of use

- Food processing and beverage areas.
- Chemical plant rooms.
- Engineering workshops.
- Automotive and aviation areas.
- Factory units.
- Warehouses.
- Excellent for all demarcation and walkways.

Typical physical properties

Abrasion resistance – ASTM D4060-14	134.7 mg Loss/1000 Cycles
Compressive strength – BS EN ISO 604:2003	9.6 MPa
Tensile strength – BS EN ISO 527-2:2012	7.5 MPa
Flexural strength – BS EN ISO 178:2010+A1:2013	3.2 N/mm ²
Bond strength – BS EN 13892-8:2002	>3 N/mm ² (substrate failure)
Impact resistance – BS EN ISO 6272-1:2011	-
Temperature resistance	Tolerant of temperatures up to 45°C
Chemical resistance	Good
Slip resistance – BS 7976-2:2002+A1:2013	>36
Reaction to fire – EN13501-1:2018	B _{FL} – s1
UV stable	No
FerFa class	Class 3
System thickness	0.5 mm



System composition

VOC EC Solvent Emissions Directive

Component	Product	Application	VOC	Theoretical consumption	Coverage per unit	Packaging
Primer (optional)	Resuseal WB Clear (optional)	Squeegee/roller	<1 g/L	0.16 kg/m ²	60 m ²	10 kg
Basecoat	Resucoat HB	Squeegee/roller	186 g/L	0.25 kg/m ²	60 m ²	15 kg
Broadcast	54 Mesh/0.3mm aluminium oxide aggregate	Broadcast	N/A	0.1 kg/m ²	250 m ²	25 kg (source dependant)
Topcoat	Resucoat HB	Squeegee/roller	186 g/L	0.25 kg/m ²	60 m ²	15 kg

Application guidance

Important installation note

Sherwin-Williams materials shall only be installed by approved contractors. The following information is to be used as a guideline for the installation of the system in conjunction with the product data sheets used for the system. Contact Sherwin-Williams Technical Service Department for assistance prior to application. Email: technicale@sherwin.com or Tel: +44 (0)1204 556457.

Substrate requirements and surface preparation

General considerations

Sherwin-Williams flooring systems can be applied to a variety of substrates. Proper surface preparation is required, specific of the substrate type. Concrete is the most common substrate and this document states surface preparation guidance for this specific substrate. Other types of substrate can be covered too. Please contact Sherwin-Williams Technical Service Department prior to starting the project to obtain guidance on surface preparation for specific substrate or condition.

Concrete – substrate requirements

To achieve the best performance from Resucoat HB SR substrates must be clean, sound, dry and free of surface laitance with a minimum strength of 25 N/mm².

Ideally substrates should be free from rising damp and water pressure and it is good practice to take a moisture content reading of a concrete substrate, particularly for any new slabs.

If substrates have moisture levels above 75% ERH as per BS8204, or if no damp proof membrane is present then Resuprime MVT can function as a surface applied damp proof membrane as the primer as advised in with the product data sheet. The number of coats of Resuprime MVT will be dependent on the moisture content.

Concrete – surface preparation

Concrete surfaces should be prepared by vacuum shot-blasting or mechanical abrasion as required to achieve a surface texture which will function as a mechanical key to maximise adhesion of the resin system.

Thoroughly vacuum the surface and any joints to remove all loose dust and debris. Ensure that all preparation is carried out to the edges of slabs, walls etc. to ensure full bonding of the system to a sound surface. Any debris should be recovered from the floor surface and joints etc.

Significant mechanical damage, pitting, and cracks may need to be addressed and repaired prior to the application of the primer; these should be identified by survey.

For recommendations, consult Sherwin-Williams Technical Service Department.

Temperature

Throughout the application process, substrate temperature ideally should be 10°C–25°C and a relative humidity <90% ERH, with a minimum air temperature of 15°C and no condensation. Do not pre-warm this product as working times will be substantially reduced if materials are warm. Substrate temperature must be at least 3°C above the dew point. The material should not be applied in direct sunlight, if possible.



Application guidance


System installation

Important: It is critical to adhere to the mixing instructions for full system cure and performance.

1. Primer (optional)	Resuseal WB Clear	<ul style="list-style-type: none">• Mix Resuseal WB Clear Part A (base) with Resuseal WB Clear Part B (hardener) to a uniform consistency. If a separate mixing bucket is being used mix thoroughly ensuring all contents of both components are removed from the buckets supplied.• Mix using a low speed mixer and paddle (300–400 rpm) for 2–3 minutes, until a uniform mixed product is obtained.• The mixed unit should be applied immediately by roller, brush and/or squeegee with a consistent procedure at a rate of 6 m²/kg, with no puddles. Floor areas should be cross-rolled to ensure even application and to minimise roller marks.• Allow to cure for a minimum 8 hours at 20°C.
2. Basecoat	Resucoat HB	<ul style="list-style-type: none">• Premix Resucoat HB Part A (base) separately for one minute and until uniform, exercising caution not to trap air into the material. Mix Resucoat HB Part A (base) with Resucoat HB Part B (hardener) to a uniform consistency. If a separate mixing bucket is being used mix thoroughly ensuring all contents of both components are removed from the buckets supplied.• Mix using a low speed mixer and paddle (300–400 rpm) for 2–3 minutes, until a uniform mixed product is obtained.• The mixed unit should be applied immediately by roller, brush and/or squeegee with a consistent procedure at a rate of 4 m²/kg, with no puddles. Floor areas should be cross-rolled to ensure even application and to minimise roller marks.• Allow to cure for a minimum 6 hours at 20°C or until the surface has lost its tackiness.
3. Broadcast	Aluminium oxide aggregate	<ul style="list-style-type: none">• As soon as Resucoat HB has settled broadcast evenly the Aluminium Oxide Aggregate into the wet resin consistently at an approximate rate of 0.1 kg/m² (or 10m² per kg). The Aluminium Oxide Aggregate may be spread evenly by hand or mechanical blower.• Continue broadcasting to until the floor aggregate appears evenly distributed with a light texture without any clusters of aggregate.• Allow to cure for a minimum 6 hours at 20°C or until the surface has lost its tackiness.• Any imperfections such as high spots or clusters of aggregate should be smoothed or treated before the application of the topcoat. (It is possible to incorporate a light addition of aggregate into the topcoat of Resucoat HB if required).
4. Topcoat	Resucoat HB	<ul style="list-style-type: none">• Premix Resucoat HB Part A (base) separately for one minute and until uniform, exercising caution not to trap air into the material. Mix Resucoat HB Part A (base) with Resucoat HB Part B (hardener) to a uniform consistency. If a separate mixing bucket is being used mix thoroughly ensuring all contents of both components are removed from the buckets supplied.• Mix using a low speed mixer and paddle (300–400 rpm) for 2–3 minutes, until a uniform mixed product is obtained.• The mixed unit should be applied immediately by roller, brush and/or squeegee with a consistent procedure at a rate of 4 m²/kg, with no puddles. Floor areas should be cross-rolled to ensure even application and to minimise roller marks.• Allow to cure for a minimum 12–16 hours at 20°C before receiving light traffic.



Sherwin-Williams high performance flooring

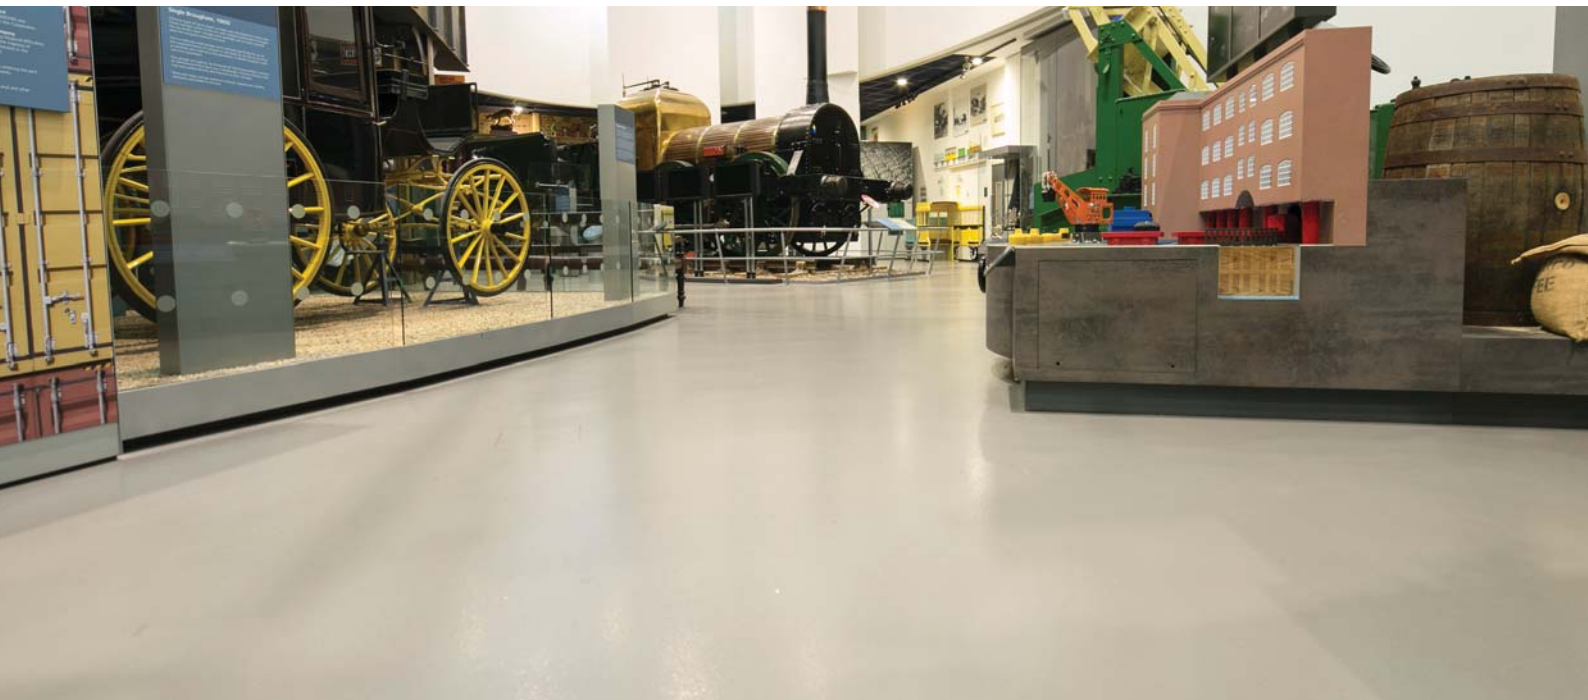

Resucoat HB SR – finished working system. Museum of Liverpool, United Kingdom.

Clean up

Clean up mixing and application equipment immediately after use. Use appropriate solvent such as Xylene. Observe all fire and health precautions when handling or storing solvents.

Safety

Refer to the SDS sheet before use. All applicable laws and particular plant safety guidelines must be followed during the handling and installation and cure of these materials.

Safe and proper disposal of excess materials shall be done in accordance with regional legislation.

Disclaimer

The information and recommendations set forth in this document are based upon tests conducted by or on behalf of The Sherwin-Williams Company. Such information and recommendations set forth herein are subject to change and pertain to the product(s) offered at the time of publication. Published technical data and instructions are subject to change without notice.

Consult technical@sherwin.com to obtain the most recent product data information and application instructions.

Material storage

Store materials in a temperature controlled environment (10°C–30°C) and out of direct sunlight.

Keep resins, hardeners, and solvents separated from each other and away from sources of ignition.

Maintenance and cleaning

Sherwin-Williams recommend a floor scrubber utilising R.S. Industrial Floor Cleaner or similar with dirty water being removed. Isolated localised cleaning can be carried out using R.S. Tyre Mark Remover, R.S. Fats & Grease Remover & R.S. Oil Remover.

All surfaces should be thoroughly rinsed with clean water after the use of chemical cleaners.

Please refer to the Sherwin-Williams Guide for cleaning resin floors for advice.

Warranty

The Sherwin-Williams Company warrants our products to be free of manufacturing defects in accord with applicable Sherwin-Williams quality control procedures. Liability for products proven defective, if any, is limited to replacement of the defective product or the refund of the purchase price paid for the defective product as determined by Sherwin-Williams. No warranty or guarantee of any kind is made by Sherwin-Williams, expressed or implied, statutory, by operation of law or otherwise including merchantability and fitness for a particular purpose.



To learn more, contact us

Europe & Africa: +44 (0)1204 556 454 sales.uk@sherwin.com

Middle East & India: +971 4 8840200 sales.me@sherwin.com

North America: +1 800 524 5979

Asia: +8 621 5158 7798

www.resinflooring.sherwin.eu